


PLAN VIEW

1/4" = 1'-0"

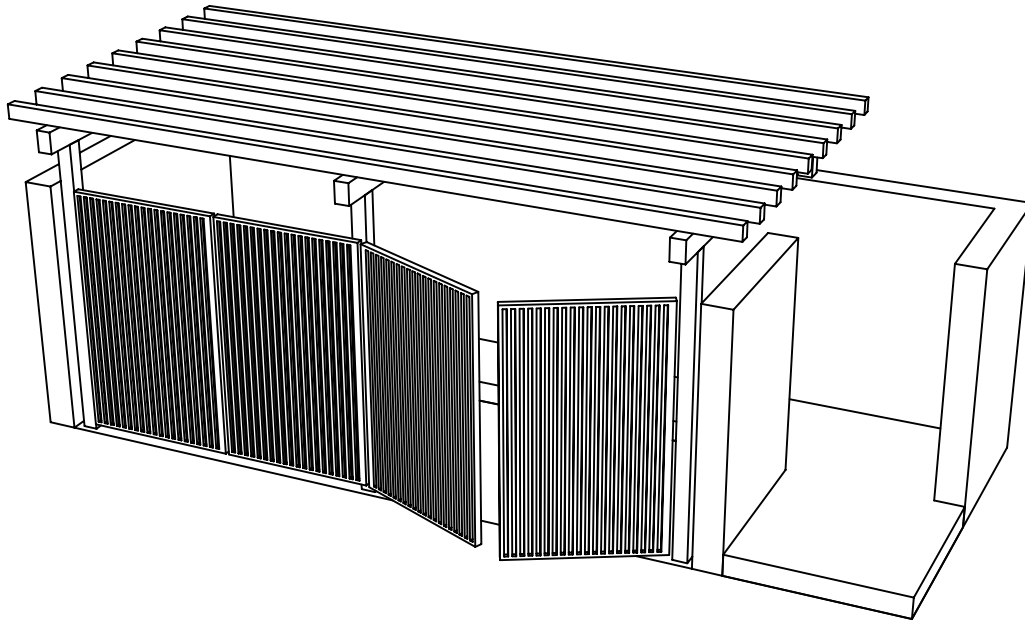

PERSPECTIVE VIEW

NO SCALE



City of Cathedral City  
68-700 Avenida Lalo Guerrero  
Cathedral City, Ca. 92234  
Ph. (760) 770-0340

## TRASH ENCLOSURE STANDARD


**BUILDING DEPARTMENT**

Scale: AS SHOWN

Date: JUNE 2002

Sheet: 1 of 2 Sheets

Drawn By: KSL  
Checked By: DP/BJ

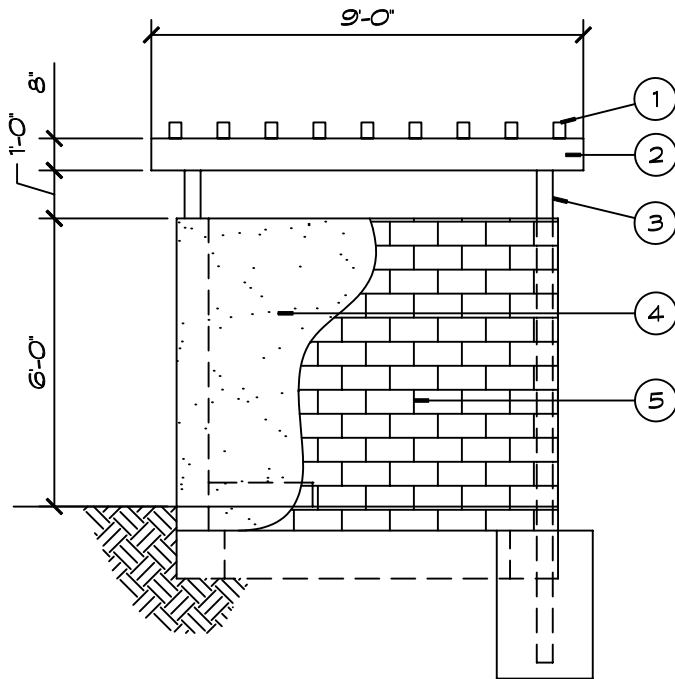


**SIDE ELEVATION**

1/4" = 1'-0"

**NOTES:**

1. 3x4 @ 12" OC TRELLIS.
2. 4x6 BEAM.
3. 4x4 SUPPORT COLUMNS;  
SET IN 24"Ø x 3' DEEP FOOTING.
4. SKIM COAT STUCCO.
5. 8x8x16 CONCRETE BLOCK, #4 REBAR  
VERT. @ 24" OC CENTERED. #4 REBAR  
HORIZ. BOND BEAM @ 24" OC; SOLID  
GROUTED; TRAVELED CONCRETE CAP
6. 6" CONCRETE SLAB W/ #3 REBAR @  
18" OC EACH WAY OVER 90%  
COMPACTED BASE, 4% MAX SLOPE TO  
DRAIN.
7. 6" CONCRETE CURB (WHEEL STOP),  
TYP. AT INSIDE PERIMETER.
8. SLIDE BOLT PER CITY STANDARDS.
9. CANE BOLT PER CITY STANDARDS.
10. 2x3 TS GATE FRAME, MITER CUT &  
WELD CORNERS, GRIND ALL CORNERS  
SMOOTH; 1-1/2" x 3/8 BAR STOP WELDED  
FLUSH WITH INSIDE FACE OF FRAME

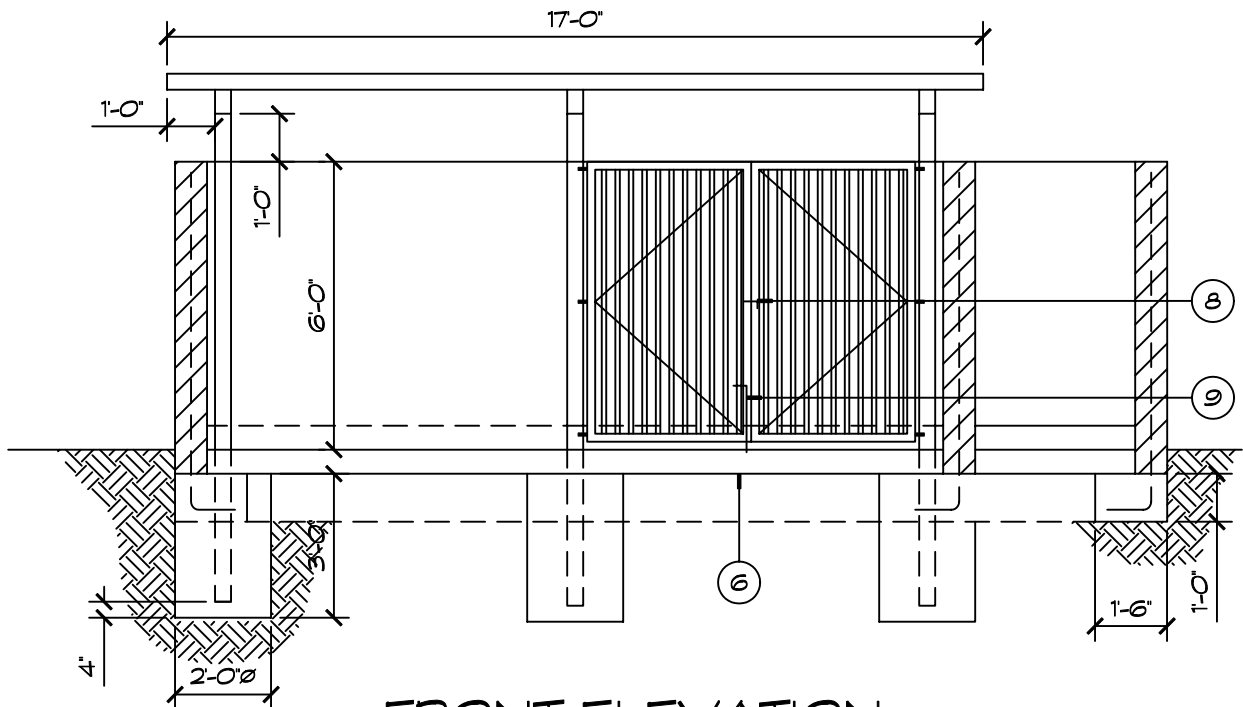

**FRONT ELEVATION**

1/4" = 1'-0"